

March 31, 2017

**Mail To:**

**Colin Gallaway**  
**Gallaway Safety and Supply, INC.**  
205 Carlton Dr.  
Eighty Four, PA 15330  
  
email:colin@gallawaysafety.com

**Bill To:**

**<= Same( PO : 128)**


Dear Mr. Gallaway:

Thank you for consulting TRI/Environmental, Inc. (TRI) for your materials testing needs. TRI is pleased to submit this final report for laboratory testing.

Project: **F2992-15 ANSI 105: 2016 Testing**  
TRI Job Reference Number: 27746  
Material(s) Tested: 1 , Glove  
Gallaway GSI  
Test(s) Requested: Cut Resistance (ASTM F2992-16) via TDM 100 Tester

If you have any questions or require any additional information, please call us at 1-800-880-8378.

Sincerely,



Sam Allen  
President  
Materials Services



LABORATORY TEST REPORT

Client: Gallaway Safety and Supply, INC.

Project: F2992-15 ANSI 105: 2016 Testing

Average Applied Load x, ( gf )	Average Normalized Cut Distance y, ( mm )	Log Cut Distance Y'=Log10y
767	11.191	1.049
767	16.302	1.212
767	13.502	1.130
767	13.513	1.131
767	14.329	1.156
675	28.712	1.458
675	27.647	1.442
675	29.396	1.468
675	29.910	1.476
675	30.791	1.488
583	51.870	1.715
583	43.263	1.636
583	44.697	1.650
583	49.912	1.698
583	45.383	1.657


Instrumentation	TDM 100
Standard	ASTM F2992-16
Log Number	27746
Sample ID:	Gallaway GSI
Date	3/31/2017
Blade Designation	GRU GRU 88-0121-0000
Blade Lot #	3979 2017 662030 001 001

Parameters	Value	Units
Mass/Unit area	15.86	Oz/Yd <sup>2</sup>
Thickness	0.119	inch
Calibration Cut before	17.917	mm
Calibration Cut after	16.719	mm

Interpolated Weight (g) to Cut after 0.8 in (20 mm) of Blade Travel
<b>717</b>

Correlation Coefficient for Exponential Fit
R <sup>2</sup> = 0.956

Regression Analysis

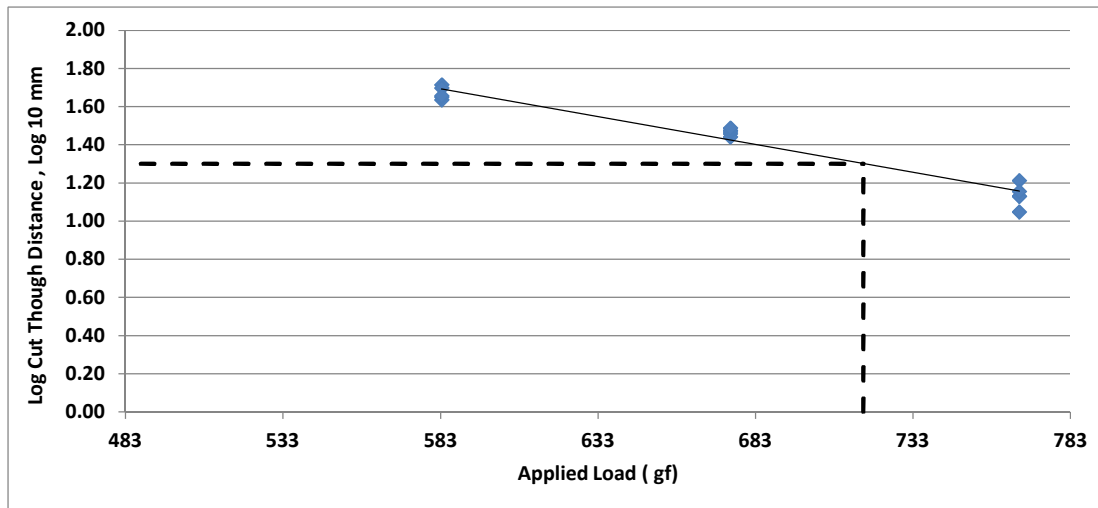

ANSI/ ISEA 105-2016 Classification, LEVEL: - A2